



# Cradle Swing - Timber

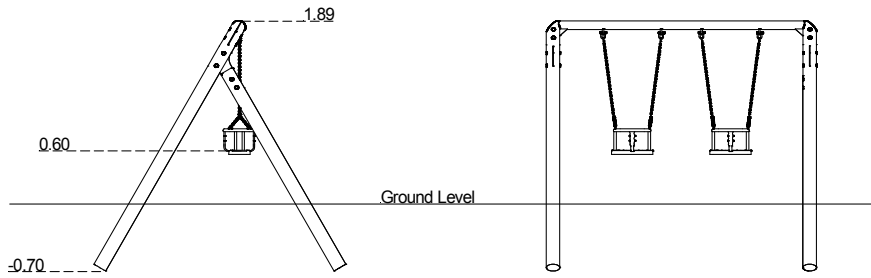

- Loosefill Area
- Impact Area
- Free Space
- Unit Spacing Boundary

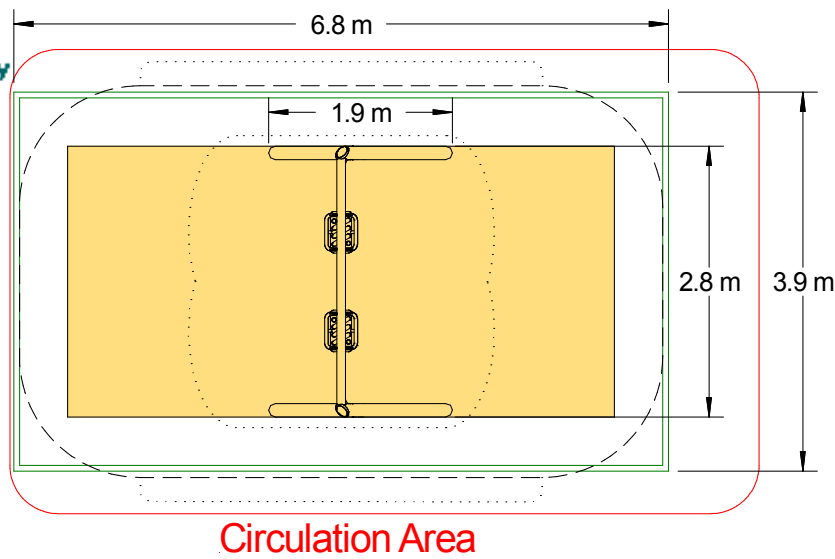

<b>Technical Information</b>		
	<b>STANDARD</b>	<b>ANTIWRAP</b>
<b>Equipment Dimensions</b>		
Length / Width / Height	1.9 x 2.8 x 1.9m	1.9 x 2.8 x 1.9m
<b>Surfacing and Area Required</b>		
Minimum Space Required L/W/H	6.8 x 5.3 x 3.4m	6.8 x 5.3 x 3.4m
Max Gradient Of Ground	1 in 50	1 in 50
Free Height Of Fall	1.3m	1.3m
Impact Area -	15.87m <sup>2</sup>	15.87m <sup>2</sup>
Loosefill At 250mm	7m <sup>3</sup>	7m <sup>3</sup>
Bark / Cushionfall / Sand		
Grasslok Tiles	30m <sup>2</sup>	30m <sup>2</sup>
<b>Installation Information</b>		
Overall Weight	167 kg	174 kg
Heaviest Part	35 kg	35 kg
Largest Part	2.8 x 0.3m	2.8 x 0.3m
Longest Part	3.0 m	3.0 m
Concrete Required	0.4m <sup>3</sup>	0.4m <sup>3</sup>
<b>KITEMARKED TO BS EN 1176</b>		