



PDS_006.008.070

SMART-LINE - SWING CORNER 'RIGHT' - SQUARE



MANUAL : MSLA
SALESSTATUS :
PRODUCT DIMENSIONS :

MATERIAL :

EN swing corner 'right'

- powder coated steel
- right-angled (90°)
- made of steel tubes
- plate thickness about 2,5 mm (Smart-Line 2 mm)
- bore holes for fixation Ø 10 mm

NL hoekverbinding 'recht'

- gepoedercoat staal
- rechte hoek (90°)
- gemaakt van stalen buizen
- wanddikte ongeveer 2,5 mm (Smart-Line 2 mm)
- schroefgaten voor bevestiging Ø 10 mm

FR angle acier 'droit'

- acier thermolaqué par poudrage
- angle droit (90°)
- fabriqué à base de tubes
- épaisseur de la paroi environ 2,5 mm (Smart-Line 2 mm)
- trous de fixation Ø 10 mm

DE 'rechtes' Rohrverbinder

- pulverbeschichteter Stahl
- rechtwinkelig (90°)
- gemacht aus Rohren
- Blechdicke ca. 2,5 mm (Smart-Line 2 mm)
- Bohrlöcher für Befestigung Ø 10 mm

ES ángulo columpio 'recto'

- termolacado por espolvoreado
- ángulos rectos (90°)
- fabricado de tubos de acero
- espesor del material aprox. 2,5 mm (Smart-Line 2 mm)
- agujeros de fijación Ø 10 mm

PL łącznik do huśtawki okrągły typu 'right'


- stal malowana proszkowo
- kąt prosty (90°)
- wykonany z rur stalowych
- grubość blachy 2,5 mm (Smart-Line 2 mm)
- otwory montażowe Ø 10 mm

PACKAGING

006.008.070.	3,9 kg	2	41 x 31 x 28 cm	9 kg
006.008.070.	72		120 x 80 x 186 cm	320 kg

SMART-LINE - SWING CORNER 'RIGHT' - SQUARE

DRAWINGS:

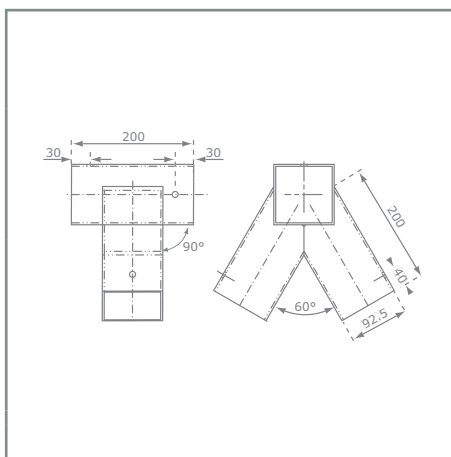

VARIATIONS :

-  006.008.070.001 Smart-Line - swing corner 'right' - square 90/90 - green
-  006.008.070.003 Smart-Line - swing corner 'right' - round 100/80 - green
-  006.008.070.007 Smart-Line - swing corner 'right' - round 100/100 - green